


## DESIGN

- Conductor**  
Copper, Bare
- Conductor construction**  
Class 5 = flexible
- Insulation**  
Rubber (EPR) E14
- Sheathing Material**  
Rubber (CR) EM2

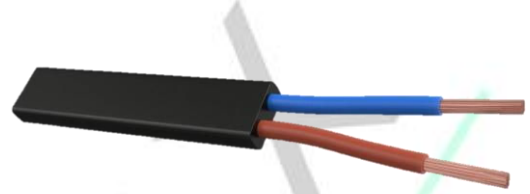

## APPLICATIONS

The Cable is suitable for dry and wet rooms as well as outdoors for temporary installation of fairy lights

## CHARACTERISTICS

- Flame Retardant** VDE 0482-332-1-2/IEC 60332-1-2
- Max Temperature on Conductor** 60°C
- Permitted outer cable temperature, Fixed Min.** -25°C - + 60°C
- Nominal Voltage Uo/u** 300/500 V
- Standards** EN 50525-2-82

## DIMENSIONS – H05RNH2-F

Part Number	Cross Section (mm <sup>2</sup> )	Conductor Resistance (Ohm/Km)	Width of (flat) cable approx (mm)	Height of (flat) cable approx (mm)	Weight (Kg/Km)
RF-001	2x1.5 Green	13.3	14	6	145
RF-002	2x2.5 Black	7.41	14	6	195

\*\* The product and information presented in this document are for calculation only and subject to technical progress. Outer diameters are approximately \*\*